SIEMENS

Data sheet 5TC1296



DELTA REFLEX SMOKE DETECTOR 230V CAN BE NETWORKED DIMENSIONS 115MM X 43MM TITANIUM WHITE

Model		
Type of certification / NCP		No
Cable entry type		Base
Design of fire alarm / Smoke detector		Yes
Design of the product / explosion-proof design		No
Design of transmission medium / wireless transmission		No
General technical data		
Response value temperature	°C	50
Outer diameter / of the enclosure	mm	111
Loudness level	dB	85
Voltage		
voltage supply		230 V AC and 9 V alkaline back-up battery (included
		in the scope of supply)
Supply voltage		
Type of voltage / of the supply voltage		AC
Protection class		
Protection class IP		IP30
Appearance		
Color		white
Product details		
Product component / Integrated / orientation lighting		No

Product expansion / optional / can be networked with No wireless connection Product function Product function No • of backup battery / rechargeable Number of fire detectors / networkable 1 Mechanical Design Height 40 mm Length 180 mm Mounting type assembly Mounting type / mounting in cable duct No Certificates Certificate of suitability Yes VdS approval **General Product Approval Declaration of Conformity** other

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TC1296

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/5TC1296/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TC1296

CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://ausschreibungstexte.siemens.com/tiplv

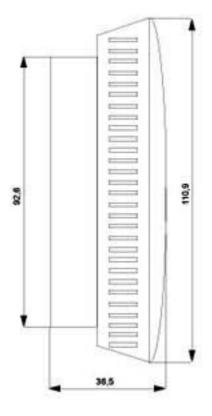

last modified: 05.05.2015